




R-520LW

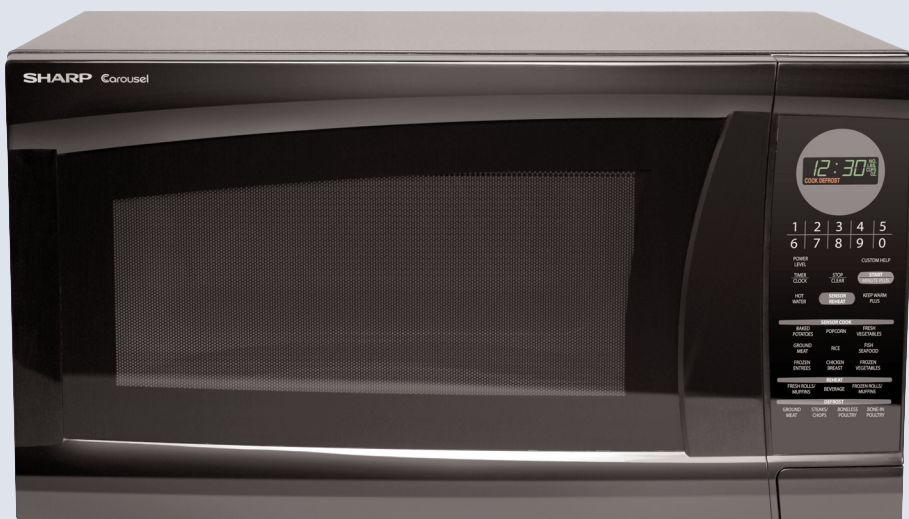

R-520LK

Carousel®



The R-520 Series features 1200 watts of cooking power with 9 Smart & Easy® Sensor Settings and a 16" diameter turntable that allows large casserole dishes. Available in Black: R-520LK and White: R-520LW.

Features:

Smart & Easy® Sensor Settings adjust the right time and power levels automatically for 9 popular microwave favorites including popcorn, fresh vegetables, frozen entrees, rice, baked potatoes, ground meat, poultry, fish and seafood.

Pops Popcorn automatically for perfect results with all types of microwave popcorn.

Keep Warm Plus lets you keep hot foods hot up to 30 minutes after cooking is finished with no loss of quality.

Three Reheat Options make it especially easy to heat 3 often served foods: beverages, fresh rolls/muffins and frozen muffins.

Four Defrost Options quickly defrost meats and poultry by weight. Specific program for each category assures excellent, even results.

Minute Plus™ gives users one minute of high power cooking at a touch.

Kitchen Timer provides exact timing for cooking, phone calls, or other tasks.



R-520LK, R-520LW

Microwave Ovens

Specifications

Model Number	R-520LK	R520LW
Capacity (in cubic feet)	2.0	
Wattage	1200 Watts	
Color	Black	White
Outside Dimensions (w x h x d) (in inches)	24 x 13-3/8 x 19-1/8	
Automatic Settings	20	
Turntable Diameter (in inches)	16	
Defrost Options	4	
Display Type	7 Digit, 2 Color Lighted	
Interior Dimensions (w x h x d) (in inches)	17-3/8 x 10-1/2 x 18-5/8	
Oven Interior	White acrylic paint with interior light	
Net Weight (in pounds)	41	
Shipping Weight (in pounds)	46	
AC Line Voltage	120V, Single Phase, 60 Hz, AC Only	
AC Power Required	1.70 kW, 14.3 Amps	
Safety Compliance	FCC, DHHS, UL Listed	
Optional Built-in Kit 27" 30"	RK-51 (Black) RK-51K30 (Black)	RK-51W (White) RK-51W30 (White)
UPC	074000616110	074000616332

Sharp is a registered trademark of Sharp Corporation.
Product specifications and design are subject to change without notice.

Optional Trim Kit Spec

The opening in the wall or cabinet must be within the following dimensions:

RK-42S24:	HEIGHT : 15 ¹¹ / ₁₆ " to 16"
	WIDTH : 22 ¹ / ₁₆ " to 22 ³ / ₈ "
	DEPTH : minimum 19 ¹ / ₄ "
*RK-51S27,	HEIGHT : 16 ³ / ₄ " to 17"
*RK-51K30,	WIDTH : 24 ³ / ₈ " to 24 ¹¹ / ₁₆ "
*RK-51S30 &	DEPTH : minimum 20"
*RK-51W30	

Outlet should NOT be in the shaded area as indicated on Sketch 1.

NOTE 1: If the dimension of DEPTH (C) is more than 21", the outlet location may be any area on the rear wall.

NOTE 2: The floor of the opening should be constructed of plywood strong enough to support the weight of the oven and floor load (about 100 pounds). The floor should be level for proper operation of the oven. Be sure to check the local building code as it may require that the opening be enclosed with sides, ceiling and rear partition. The proper functioning of the oven does not require the enclosure.

